

Pinned Frames

Multiforce Members
End Reactions
Member Forces
Stability
Lateral Bracing




Das Spitzhäuschen. Marktplatz. Bernkastel-Kues

Pinned Frame vs. Truss



Trusses:

- 2-force members $\sim T \text{ or } C$
- ridged bodies

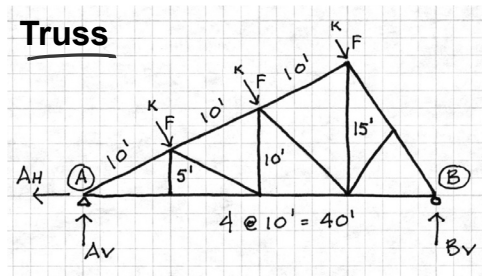


Pinned Frames:

- 2-force or multiforce (axial or bending)
- ridged body or mechanism

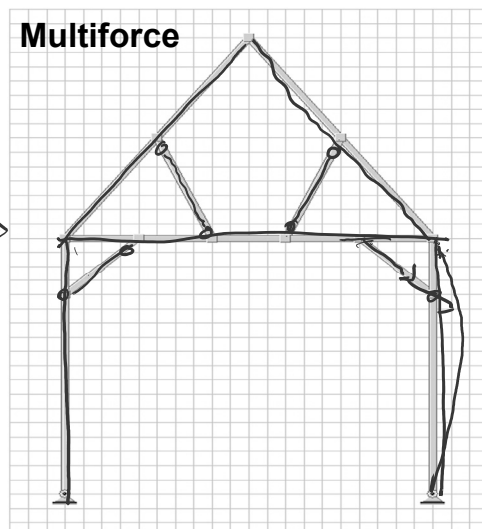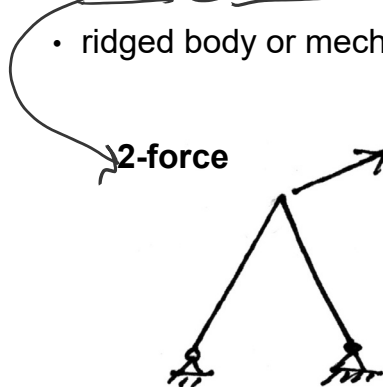


Frame Types

Frames with 2-force members
(axial forces)

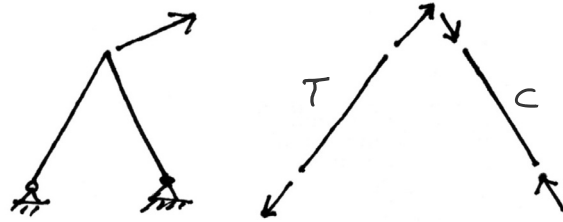


Frames with multiforce members
(bending + axial forces)

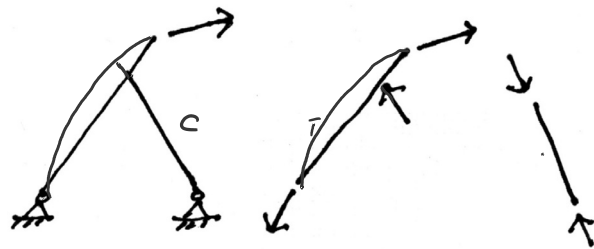

Rigidity


Nonrigid frames (require 4 or more
reaction components for stability)

Without supports they collapse.



Rigid frames (only require 3 reaction
components)


Remain a rigid body even without
supports.



2-Force Member Frames

Procedure

1. Solve external supports
 - FBDs
 - Simultaneous equations
2. Cut FBD of each member
3. Solve member forces

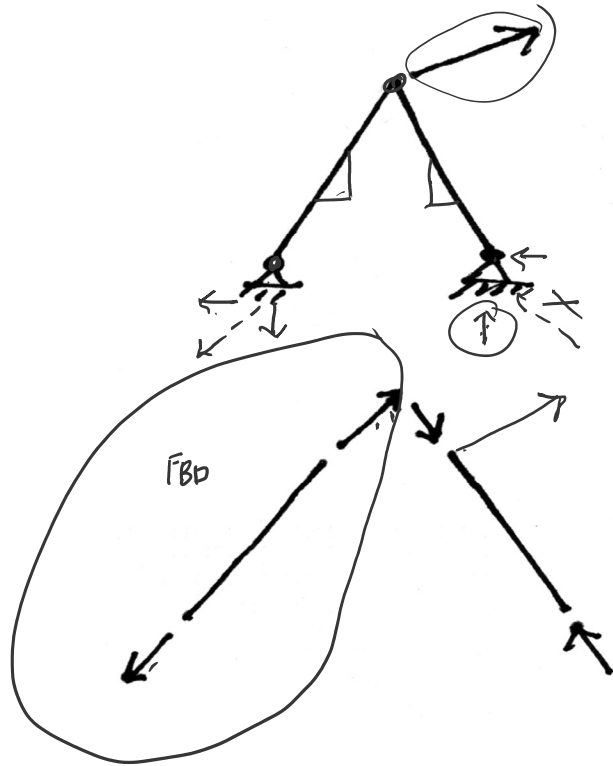

2-Force Member Frames

Find the force in the shear legs assuming a point load of 20 **lbs**.

Members **2:1 slope** (63.4° at base)

Determine the horizontal and vertical end reactions.


Reactions:

Horizontal _____

Vertical _____ ✓

Axial member force:

tension or compression? ✓

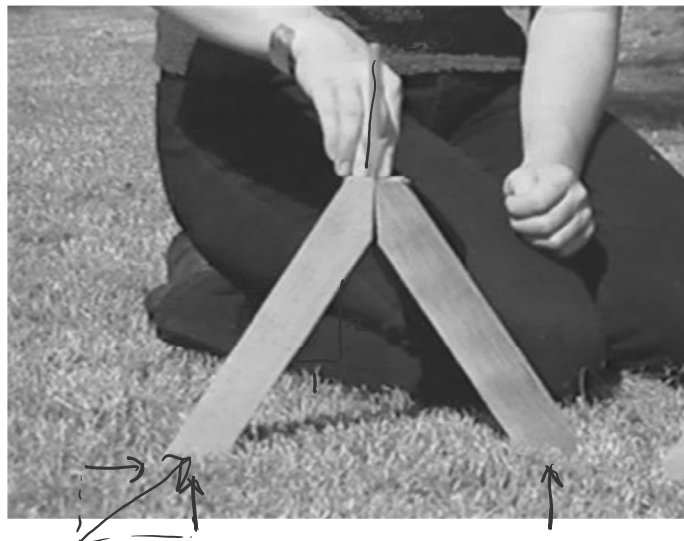

2-Force Member Frames

Analysis


1. Solve external supports
 - FBDs
 - Simultaneous equations

$$\sum M @ A = 0 = 20(12) - B_V(16)$$

$$B_V = 15^k$$

$$\sum F_V = 0 = -A_V + B_V$$

$$A_V = 15$$

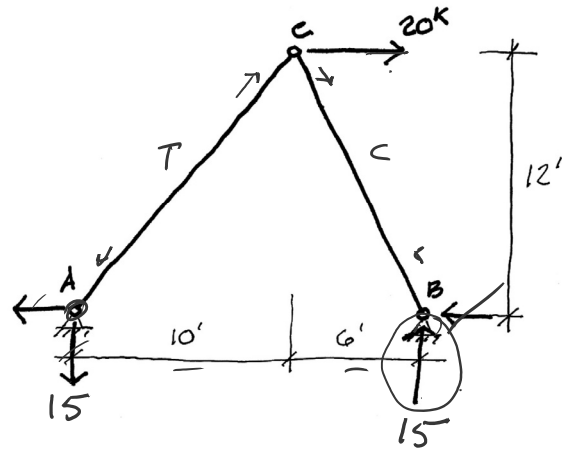

2-Force Member Frames

Analysis

2. Cut FBD of each member
For 2-force members the force components follow the slope.

BY SLOPE

$$\frac{6}{5} : \frac{15}{12.5}$$


BY SLOPE

$$\frac{2}{1} : \frac{15}{7.5}$$

REACTION COMPONENTS

$$B_V = 15^k \uparrow$$

$$B_H = 7.5 \leftarrow$$

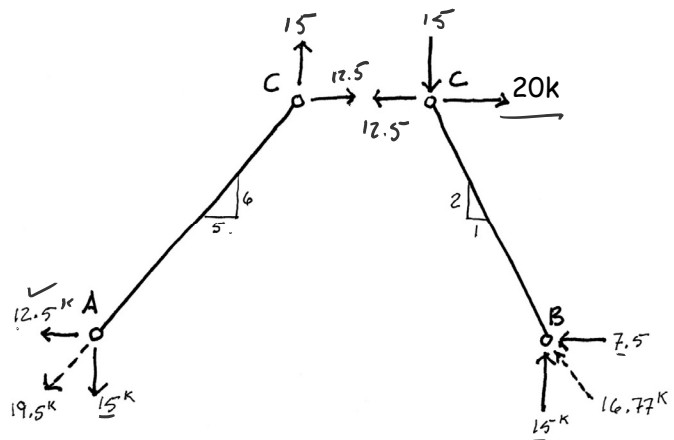

2-Force Member Frames

Analysis

3. Check member forces and balance forces.

LEFT FBD

$$\sum F_V = 0 = -15 + C_V$$

$$\underline{C_V = 15^k}$$


RIGHT FBD

$$\sum F_V = 0 = 15^k - C_V$$

$$\underline{C_V = 15^k}$$

$$\sum F_H = 0 = 20^k - 7.5 - C_H$$


$$\underline{C_H = 12.5^k}$$

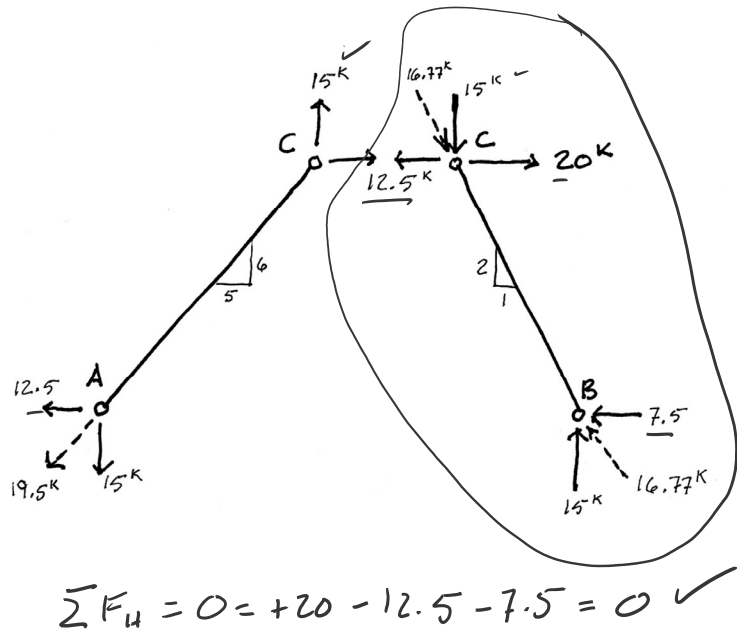

Multiforce Member Frames

Procedure

1. Solve external supports
2. Cut FBD of each member
3. Solve forces at joints.
4. Some members will be multiforce, they will be in bending.

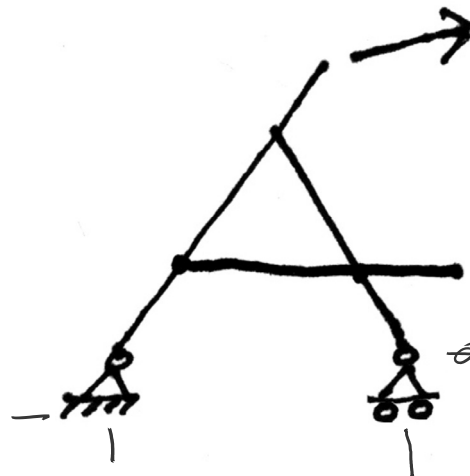

Analysis



1. Solve external supports

Get vertical components by summing moments.

$$\begin{aligned}\sum M @ A &= 0 \\ +20^k(12') + 15^k(20') - B_v(20') &= 0 \\ B_v &= 27^k \uparrow\end{aligned}$$


$$\begin{aligned}\sum F_v &= 0 \\ -A_v - 15^k + 27^k &= 0 \\ A_v &= 12^k \downarrow\end{aligned}$$

$$\begin{aligned}\sum F_H &= 0 \\ -A_H + 20^k &= 0 \\ A_H &= 20^k \leftarrow \checkmark\end{aligned}$$

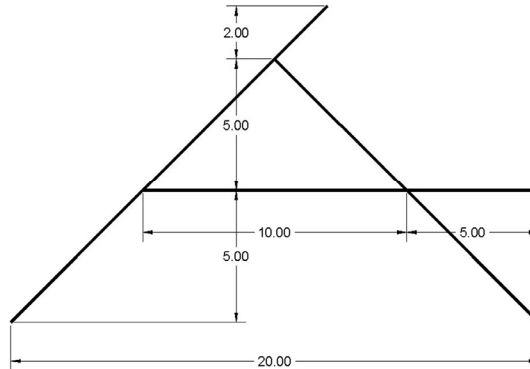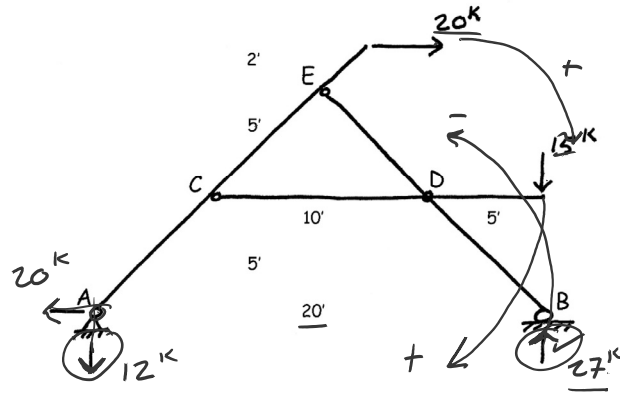

Analysis


2. Cut FBD of each member

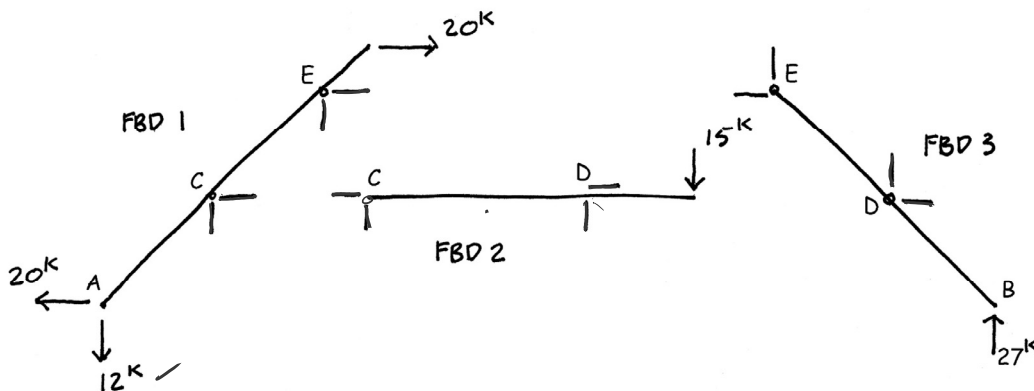

- Work between the FBDs using 3 equations of statics.
- End force components can be solved as axial and normal forces.
- The normal forces are “shear” forces and result in moments or “bending” forces.
- Not all systems are statically determinate and may then require other methods.

Analysis

3. Solve member forces

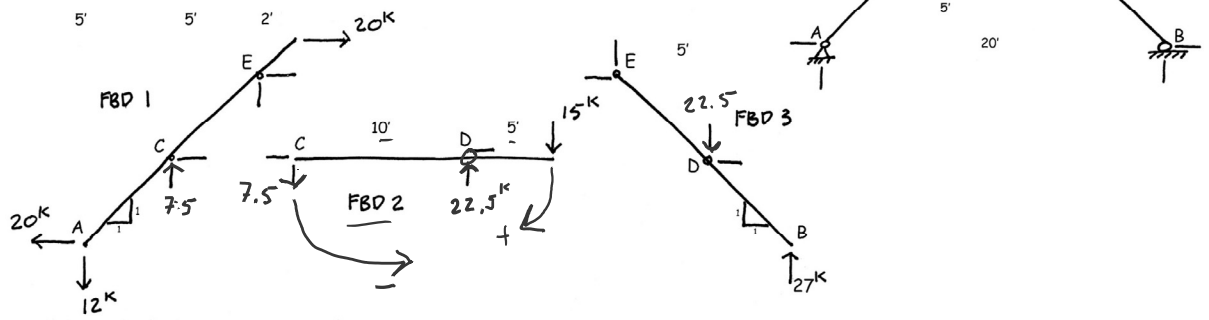

FBD 2

$$\sum M_{@D} = 0 = -C_v(10') + 15^K(5')$$


$$C_v = 7.5^K$$

$$\sum F_v = 0 = -7.5^K + D_v - 15^K$$

$$D_v = 22.5^K$$

Analysis

3. Solve member forces

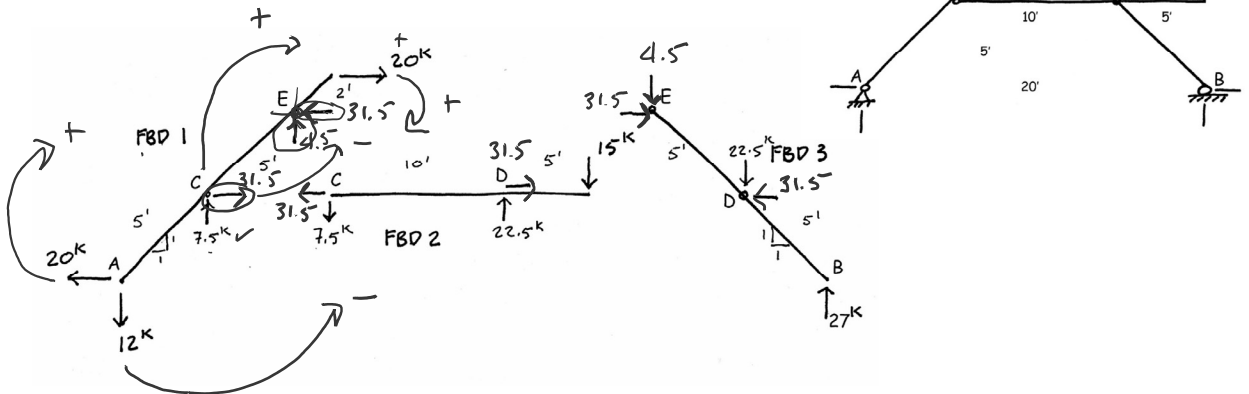

FBD 1

$$\sum M_{@E} = 20^K(10') - 12^K(10') + 7.5^K(5') - C_H(5') + 20^K(2') = 0$$

$$200 - 120 + 37.5 - C_H(5) + 40 = 0$$

$$C_H = 31.5^K$$

$$\sum F_v = 0 = -12^K + 7.5^K + E_v$$


$$E_v = 4.5^K$$

$$\sum F_H = 0 = -20^K + 31.5^K - E_H + 20^K$$

$$E_H = 31.5^K$$

Analysis

3. Solve member forces

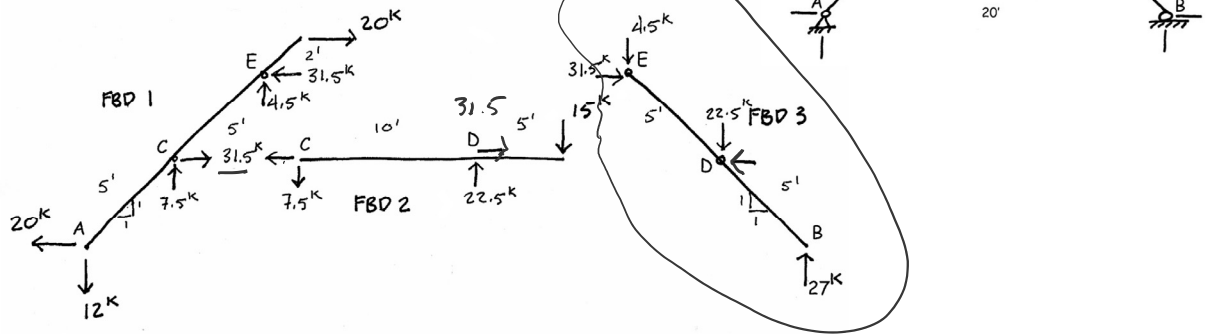

FBD 2

$$\sum F_H = 0 = -31.5^k + D_H$$

$$D_H = 31.5^k$$

FBD 3 - CHECK -


$$\sum F_H = 31.5^k - 31.5^k = 0 \quad \checkmark$$

$$\sum F_V = -4.5^k - 22.5^k + 27^k = 0 \quad \checkmark$$


Analysis

STAAD. PRO


4. Determine multiforce members

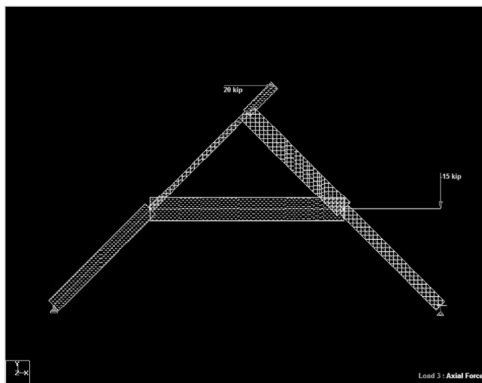


Axial Force

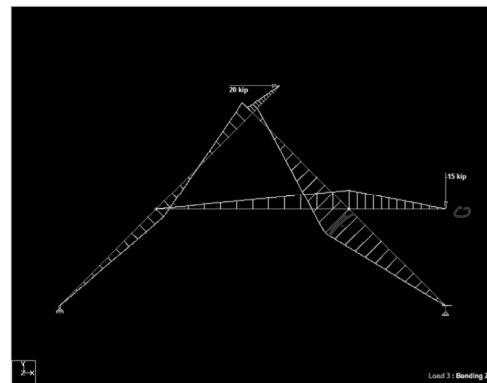

Bending Moment

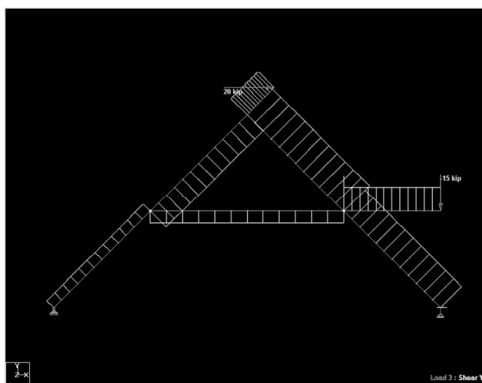

Shear Force

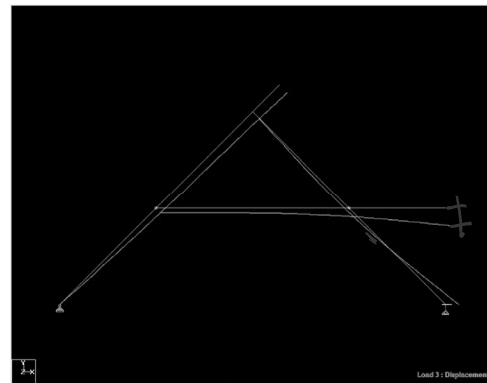

Deflection

Riverbend Timber Framing

<https://www.riverbendtf.com/>



Marty Birkenkamp



University of Michigan, TCAUP



Structures I

Slide 17 of 22

Pariseau Barn Example



University of Michigan, TCAUP

Structures I

Slide 18 of 22

Pariseau Barn Example



Motise and Tenon Joint



Pariseau Barn Example



Pariseau Barn Example






University of Michigan, TCAUP

Structures I

Slide 21 of 22

Highland Timber Framing


**HIGHLAND TIMBER FRAMING & TREE SERVICES**
An Ann Arbor Family Company Building Things *"Like They Used To."*(734) 646-3650

HOMETIMBER FRAMINGTREE SERVICESABOUT USOUR BLOGCONTACT US


Our Stock Pavilion Series

Are you looking for a backyard pavilion that will be beautiful and long-lasting? That won't look run down like the pavilions that big box stores sell? We now offer various timber frame pavilions in several stock sizes! All stock pavilions are offered in 4 post or 6 post configurations. We're happy to create one in your preferred size.


Browse The Collection Below

**Queen Post Purlin Pavilions**


Commonly used historically in covered bridges, this truss boasts greater spanning capabilities than its brother the king post truss. Featuring two posts connecting the rafters to the tie beam, it combines functionality, strength, and simple elegance. The two posts create a focal point, perfect for a large window in a great room, or the chimney of a fireplace.

**King Post Rafter Pavilions**

This is the simplest of the Highland Pavilion frames, with a heightened focus on simplicity and strength. It is based on the American timber framing tradition and boasts fewer joints than its sister frame the Queen Post Rafter Style.

**Vaulted Purlin Pavilions**

This truss is a Highland original, echoing techniques used in England in the high middle ages. It features struts transferring load from the rafters down to the posts. The continuous struts create a vaulted soaring effect for the onlooker found often in chapels.

**Queen Post Rafter Pavilions**

Commonly used historically in covered bridges, this truss features more complexity, timber, and strength than its brother the king post (Rafter style) truss. This frame is based on the American timber framing tradition and echoes common lines seen in 17th-19th century barns.

University of Michigan, TCAUP

Structures I

Slide 22 of 22