


Trusses by Sections



Analysis by sections

Examples

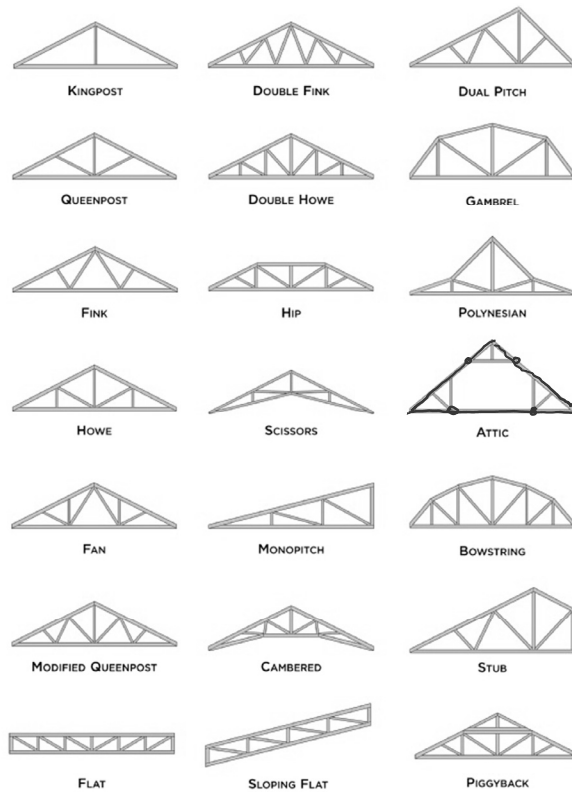

Method of Sections - procedure


1. Solve Reactions
2. Cut section through member
3. Choose point **where all but one of the unknown forces cross** and ΣM
4. Continue with ΣF_H and ΣF_V

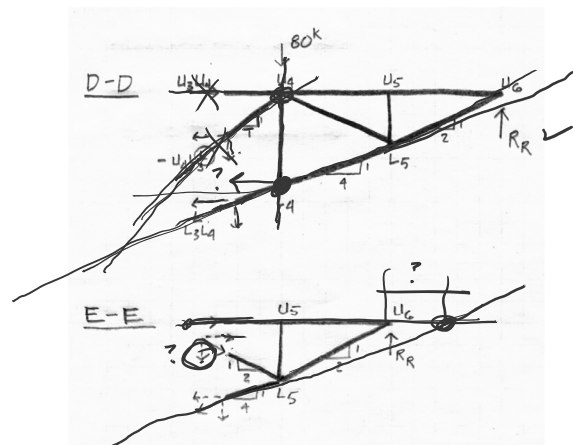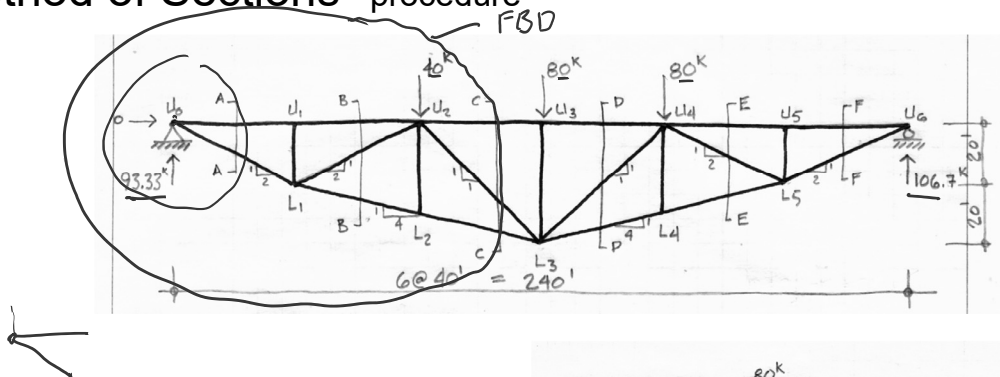

Method of Sections - example

1. Solve the external reactions for the whole truss.

Sum moments about each end. Or using symmetry, divide vertical forces evenly between reactions

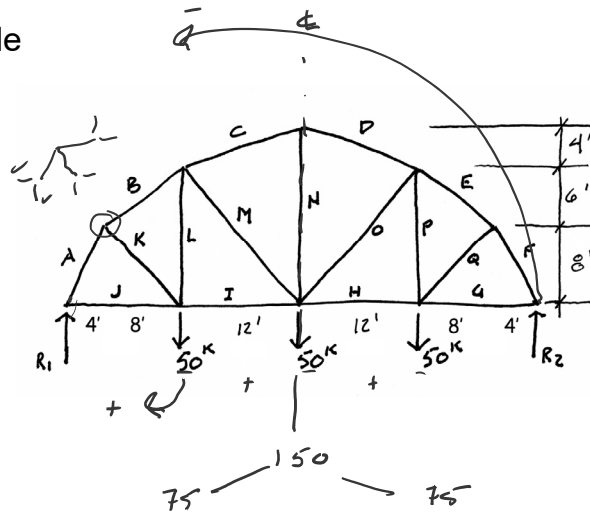

REACTIONS:



$$\begin{aligned}\sum M_R = 0 &= 50^k(12') + 50^k(24') + 50^k(36') - R_2(48') \\ R_2(48') &= 3600^k\text{-ft} \\ R_2 &= 75^k \quad \checkmark\end{aligned}$$

$$\begin{aligned}\sum M_A = 0 &= R_1(48') - 50^k(36') - 50^k(24') - 50^k(12') \\ R_1(48') &= 3600^k\text{-ft} \\ R_1 &= 75^k \quad \checkmark\end{aligned}$$

Method of Sections - example

2. Solution proceeds by cutting FBDs of either joints or sections of the truss.

Member forces are shown as horizontal and vertical force components at each cut section.

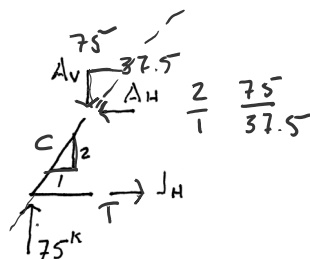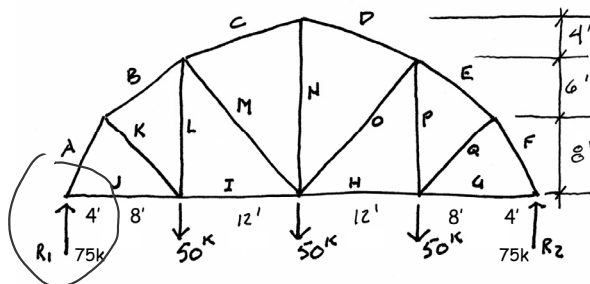

$$\begin{aligned}\sum F_v = 0 &= 75 - A_v \\ A_v &= 75^k \downarrow \\ A_h &= 37.5^k \leftarrow\end{aligned}$$



$$\begin{aligned}\sum F_h = 0 &= -37.5^k + J_h \\ J_h &= 37.5^k \rightarrow T\end{aligned}$$

Method of Sections - example

- Solution proceeds by cutting FBDs of either joints or sections of the truss.

Member forces are shown as horizontal and vertical force components at each cut section.

- Choose a point where all but one of the forces cross and sum moments.

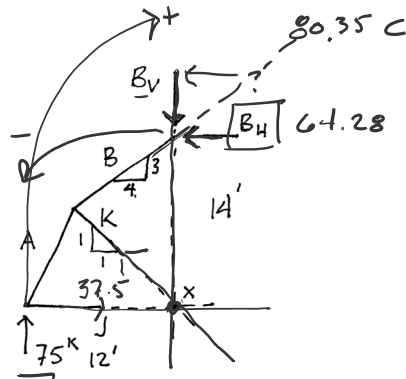
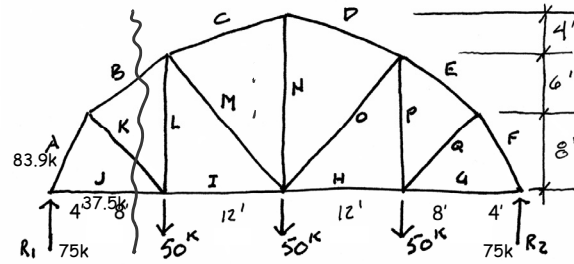


$$\begin{aligned}\sum M_x = 0 &= 75^k(12') - B_H(14') \\ B_H &= 64.28^k \leftarrow \\ \frac{3}{4} B_v &= 64.28 \\ B_v &= 48.21^k \downarrow \\ \sqrt{v^2 + h^2} &= B = 80.35^k \checkmark\end{aligned}$$

Method of Sections - example

- Continue with $\sum F_H$ and $\sum F_V$

Member forces are shown as horizontal and vertical force components at each cut section.


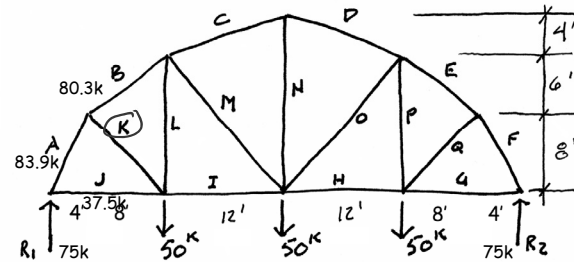


$$\begin{aligned}\sum F_H = 0 &= +37.5 - 64.28 + K_H \\ K_H &= +26.78^k \rightarrow \\ \frac{1}{1} \cdot \frac{26.78}{26.78} K_V &= 26.78^k \downarrow \\ K &= 37.87^k T\end{aligned}$$

Method of Sections - example

4. Continue with ΣF_H and ΣF_V

Member forces are shown as horizontal and vertical force components at each cut section.

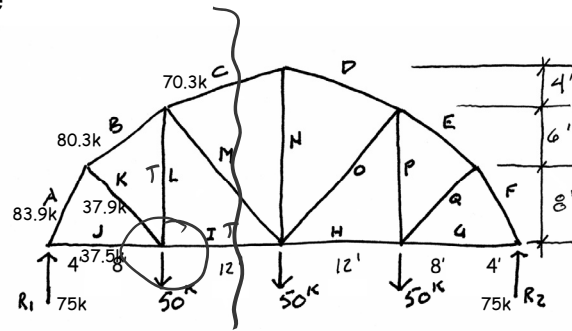

$$\Sigma F_V = 0 = 26.78^k - 50^k + L$$

$$L = 23.22^k \text{ T}$$

$$\Sigma F_H = 0 = -37.5 - 26.78 + I$$


$$I = 64.28^k \text{ T}$$

Method of Sections - example

2. Solution proceeds by cutting FBDs of either joints or sections of the truss.

Member forces are shown as horizontal and vertical force components at each cut section.

3. Choose a point where all but one of the forces cross and sum moments.

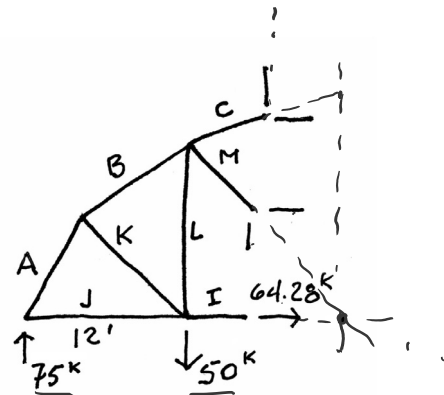

$$\Sigma M_x = 0 \quad + \quad - \quad -$$


$$= 75^k(24') - 50^k(12') - C_H(18')$$

$$C_H(18) = 1200$$

$$C_H = 66.67^k \leftarrow$$

$$C_V = 22.22^k \downarrow \quad \frac{1}{3} \cdot \frac{C_H}{66.67}$$

$$C = 70.27^k = \sqrt{C_H^2 + C_V^2}$$

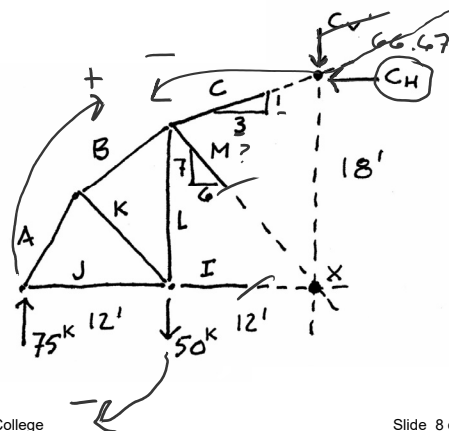



Method of Sections - example

4. Continue with ΣF_H and ΣF_V

Member forces are shown as horizontal and vertical force components at each cut section.


$$\begin{aligned}\Sigma F_V = 0 &= 75 - 50 - 22.22 - M_V \\ M_V &= 2.78 \text{ K} \downarrow \checkmark \\ M_H &= 2.38 \text{ K} \rightarrow \frac{7}{6} \cdot \frac{2.78}{1} \\ M &= 3.66 \text{ K T} \quad \sqrt{H^2 + V^2}\end{aligned}$$

$$\begin{aligned}\Sigma F_H = 0 &= -66.67 + 2.38 + I \\ I &= 64.29 \text{ K T} \checkmark\end{aligned}$$

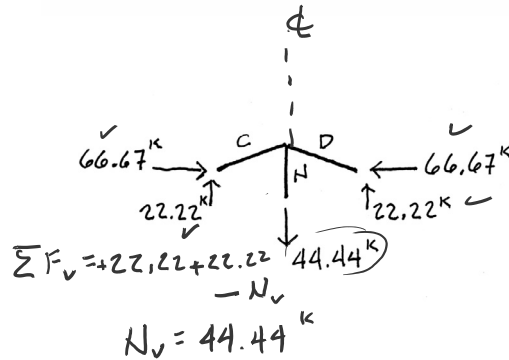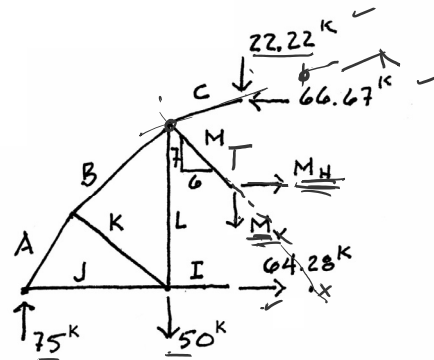

Method of Sections - example



5. Make final qualitative check of solution.

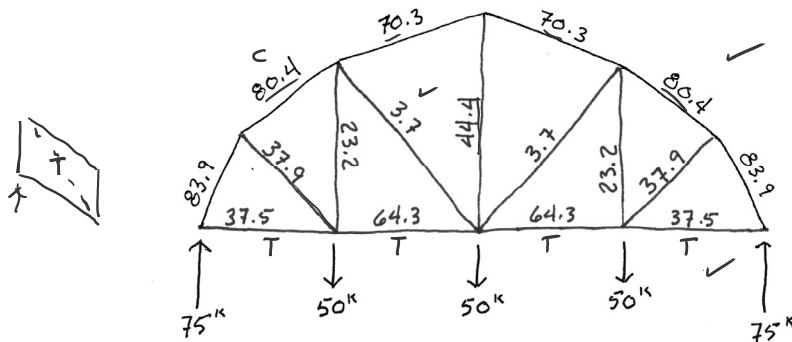

Tips on Sections

Howe Truss




1. Cut a panel with diagonals
2. ΣM at L_2 and resolve upper chord force at U_2 . This gives U_1U_2H
3. ΣM at U_1 to find L_1L_2
4. ΣM at U_2 and resolve U_1L_2 at L_2 to find U_1L_2H
5. ΣM at L_0 and resolve U_1L_2 at L_2 to find U_1L_2V
6. U_1U_2V can now be found by ΣF_V

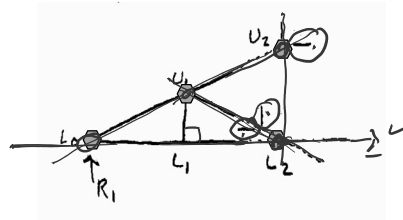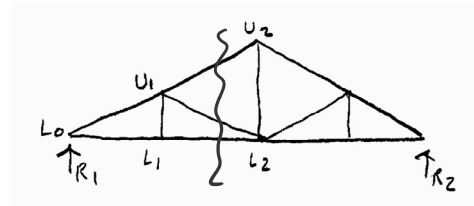

Tips on Sections

Parker Truss



1. Cut a panel with diagonals and ΣM at L_2 to solve U_1U_2H as before.
2. ΣM at U_1 to find L_1L_2
3. ΣM at U_2 and resolve U_1L_2 at L_2 to find U_1L_2H
4. Find point x in line with U_1U_2 . ΣM at x and resolve U_1L_2 at L_2 to find U_1L_2V
5. U_1U_2V can now be found by ΣF_V

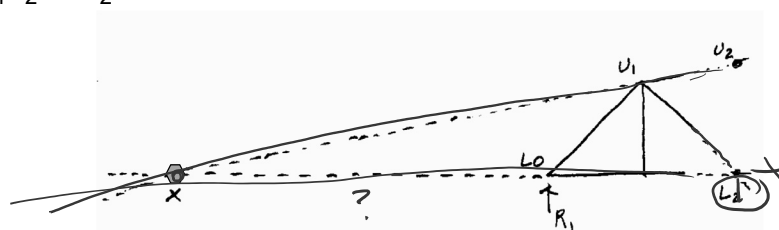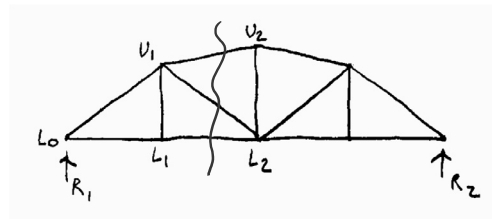

Tips on Sections

K Truss


1. Make cut A-A to avoid the mid panel joint
2. ΣM at U_1 to get L_1L_2
3. ΣM at L_1 to get U_1U_2
4. The vertical web forces can be solved using joints
5. Cut B-B through the diagonals
6. ΣM at U_2 and resolve lower diagonal at L_2 to find its H component. The V component can be found by slope triangle. Top and bottom chords are known from steps 2. & 3.
7. Repeat step 6 by ΣM at L_2 to find other diagonal.

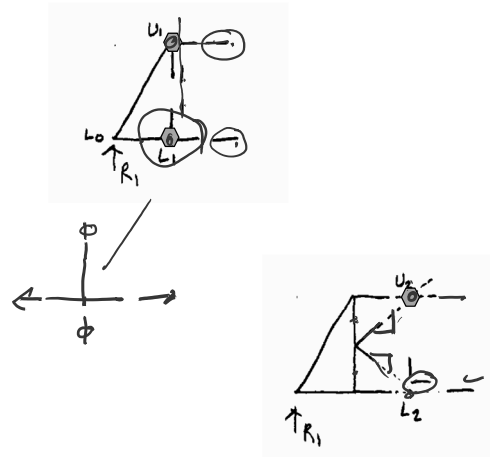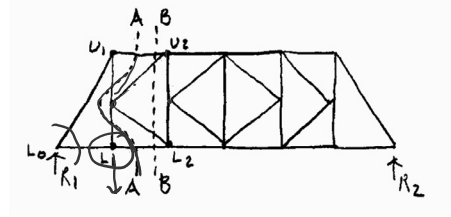


Examples of Trusses



Timber Frame

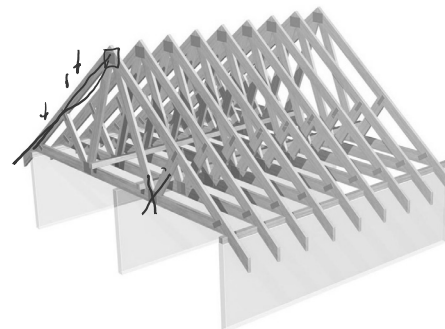

Light Frame – dimensioned lumber

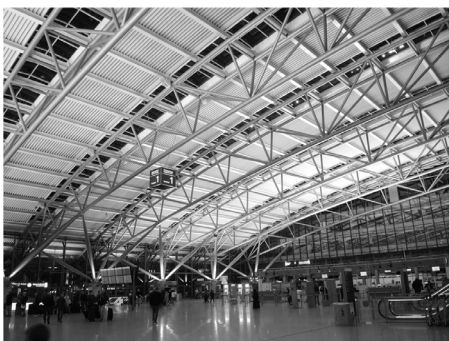



Hamburg Airport – steel tube truss



Concrete Truss – Kilburn Rd. Bridge, Calif.

Trussed Lateral Bracing

Diagrid Towers

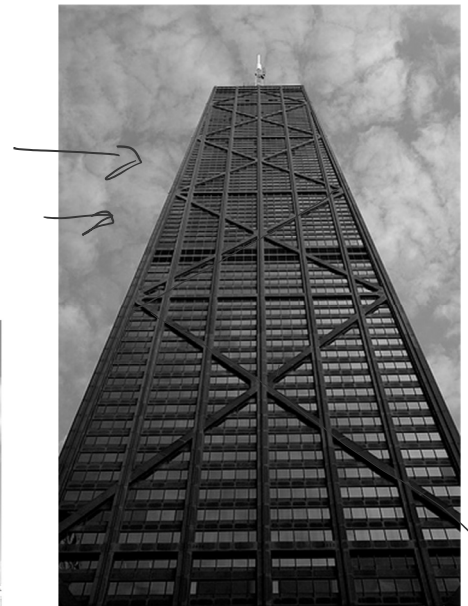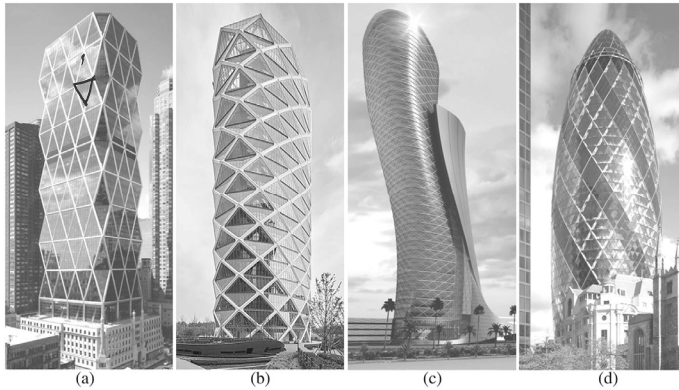

John Hancock Tower 68³
875 North Michigan Avenue, Chicago
Fazlur Kahn, SOM

Optimized Principal Stress Grid

Figure 1. (a) Original Michell's minimum frame [9], (b) structural design by Zalewski and Zablocki [105], and (c) CITIC financial centre in Shenzhen by SOM [105]. *BAKER*
William

